GENERAL
CATALOGUE

CERAMIC TILES

SAUDI MADE

الخزف السعودي
Saudi Ceramics

Index

Our ceramic tiles are available in a variety of sizes, thickness, and finishings to cater to every customers needs and requirements.

40x80x1.0 cm

PGS 04-21

Icon guide

بلاط ارضيات	بلاط الحائط	لامع	مطفي	مطفي حريري	مقاس متطابق	أوجة مختلفة	استخدام خارجي	بركة السباحة	استخدام ثقيل
FLOOR TILE	WALL TILE	GLOSSY	MATT	SILK MATT	RECTIFIED	RANDOM FACES	EXTERIOR USE	POOL	HEAVY DUTY

الخزف السعودي
Saudi Ceramics

Page elements layout guide

This catalogue contains all the information, details and characteristics available at printing time. The manufacturer, however, reserves the right to introduce modifications or changes as deemed appropriate for product improvement and the benefit of customers.

The entire contents of this catalogue are copyright. No pictures, texts, illustrations or graphic concepts may be reproduced, either wholly or partially, without the express permission of Saudi Ceramics.

All colours and hues appearing in this catalogue should be considered approximate due to the printing process involved.

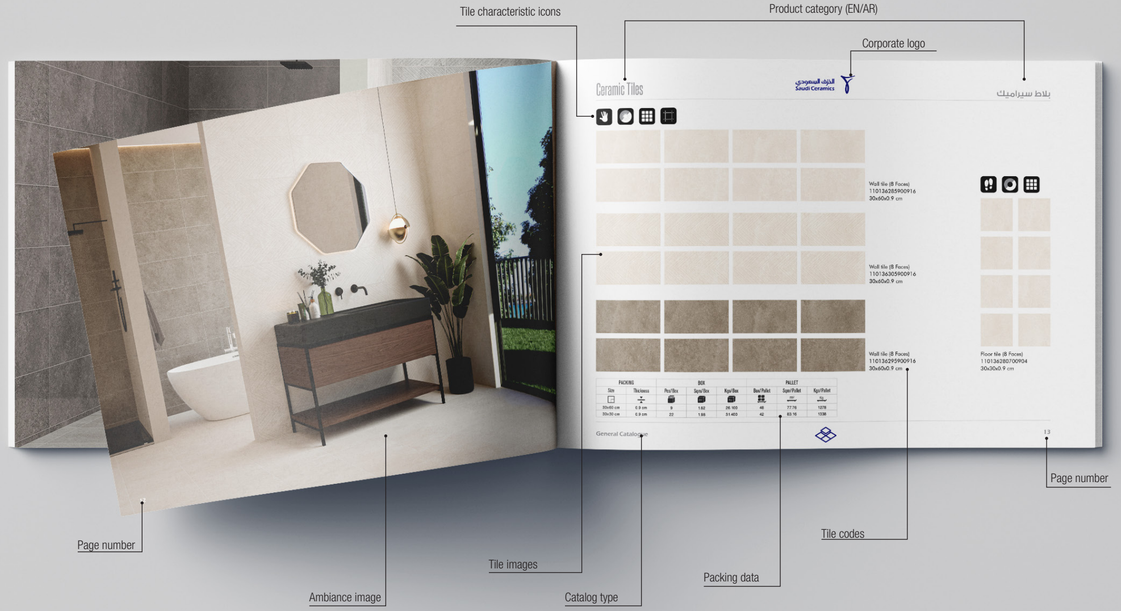


Wall tiles
40x80x1.0 cm





Wall tile (12 Faces)
110138881711016
40x80x1.0 cm



Wall tile (12 Faces)
110138901711016
40x80x1.0 cm



Wall tile (12 Faces)
110138891711016
40x80x1.0 cm



Floor tile (12 Faces)
110138881701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314





Wall tile (9 Faces)
110138911711016
40x80x1.0 cm



Wall tile (9 Faces)
110138931711016
40x80x1.0 cm



Wall tile (9 Faces)
110138921711016
40x80x1.0 cm

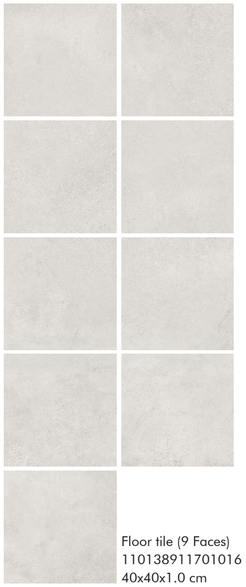

Floor tile (9 Faces)
110138911701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314





Wall tile (9 Faces)
110138941711016
40x80x1.0 cm



Wall tile (9 Faces)
110138961711016
40x80x1.0 cm



Wall tile (9 Faces)
110138951711016
40x80x1.0 cm

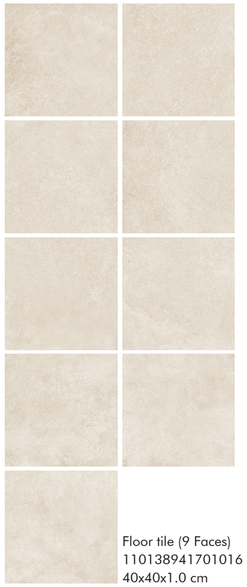

Floor tile (9 Faces)
110138941701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314





Wall tile (12 Faces)
110138971711016
40x80x1.0 cm



Wall tile (12 Faces)
110138991711016
40x80x1.0 cm



Wall tile (12 Faces)
110138981711016
40x80x1.0 cm



Floor tile (12 Faces)
110138971701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314



Wall tile (20 Faces)
110140281711016
40x80x1.0 cm

Wall tile (20 Faces)
110140291711016
40x80x1.0 cm

Floor tile (12 Faces)
110140281701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314





Wall tile (9 Faces)
110140631711016
40x80x1.0 cm



Wall tile (9 Faces)
110140651711016
40x80x1.0 cm



Wall tile (9 Faces)
110140641711016
40x80x1.0 cm

Floor tile (8 Faces)
110140631701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314





Wall tile (9 Faces)
110140661711016
40x80x1.0 cm

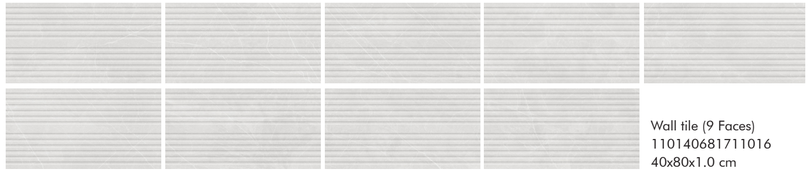

Wall tile (9 Faces)
110140681711016
40x80x1.0 cm

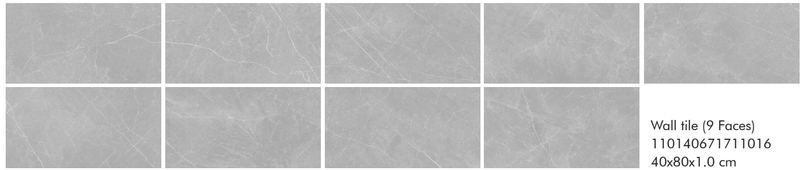

Wall tile (9 Faces)
110140671711016
40x80x1.0 cm

Floor tile (8 Faces)
110140661701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314



Wall tile (8 Faces)
110141781711016
40x80x1.0 cm



Wall tile (8 Faces)
110141771711016
40x80x1.0 cm



Wall tile (8 Faces)
110141761711016
40x80x1.0 cm

Floor tile (8 Faces)
110141781701016
40x40x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.0 cm	7	2.24	42.560	28	62.72	1210
40x40 cm	1.0 cm	9	1.44	27.00	48	69.12	1314

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIIa

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIIa	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 5.0%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.5%	± 0.5%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	3% < E <= 6%	3% < E <= 6%
	Modulus of Rupture (MOR)	ISO10545 - Part 4	>=22 N/mm2	>=22 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=1000N >=600N	>=1100N >=600N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-	-	Min.6

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIII

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIII	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 10%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.3%	± 0.3%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	10% < E <= 20%	16 ± 2%
	Modulus of Rupture (MOR) Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=12 N/mm2 >=15 N/mm2	>=15 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=600N >=200N	>=800N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-		Min.6

الخزف السعودي
Saudi Ceramics

للحجز و الاستفسار: 920011124

tamara baseeta tabby

saudiceramics
shop.saudiceramics.com

Download on the App Store
Google play

V15