GENERAL
CATALOGUE

CERAMIC TILES

SAUDI MADE

الخزف السعودي
Saudi Ceramics

Index

Our ceramic tiles are available in a variety of sizes, thickness, and finishings to cater to every customers needs and requirements.

40x80x1.4 cm

PGS 04-21

Icon guide

بلاط ارضيات FLOOR TILE	بلاط الحائط WALL TILE	لامع GLOSSY	مطفي MATT	مطفي حريري SILK MATT	مقاس متطابق RECTIFIED	أوجة مختلفة RANDOM FACES	استخدام خارجي EXTERIOR USE	بركة السباحة POOL	استخدام ثقيل HEAVY DUTY

الخزف السعودي
Saudi Ceramics

Page elements layout guide

This catalogue contains all the information, details and characteristics available at printing time. The manufacturer, however, reserves the right to introduce modifications or changes as deemed appropriate for product improvement and the benefit of customers.

The entire contents of this catalogue are copyright. No pictures, texts, illustrations or graphic concepts may be reproduced, either wholly or partially, without the express permission of Saudi Ceramics.

All colours and hues appearing in this catalogue should be considered approximate due to the printing process involved.




Floor tiles
40x80x1.4 cm





Floor tile (12 Faces)
110139001711416
40x80x1.4 cm

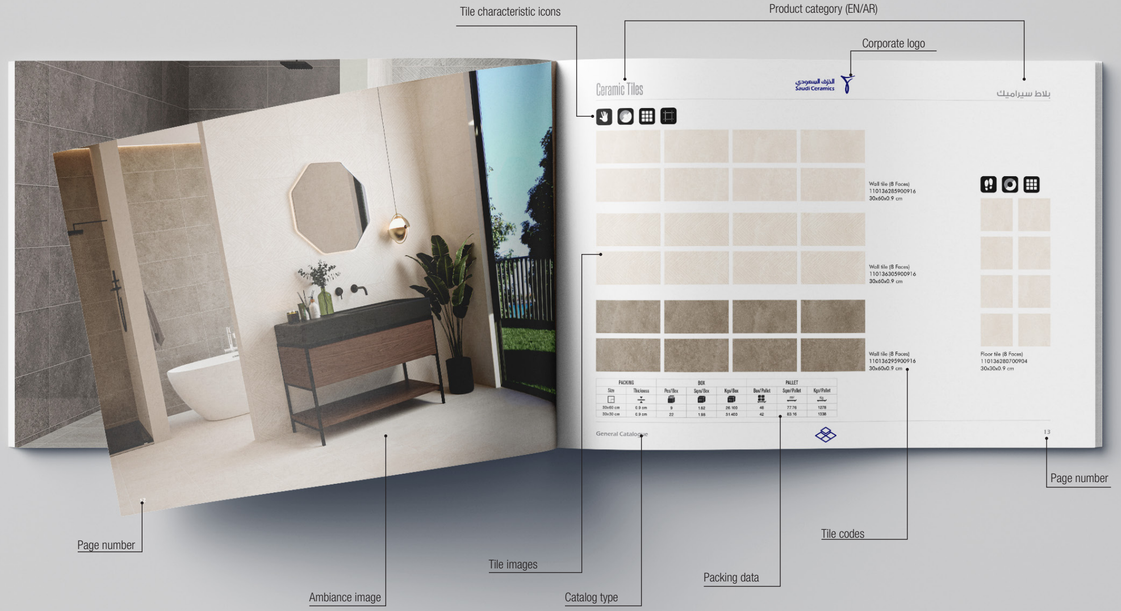PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093







Floor tile (12 Faces)
110139011711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093





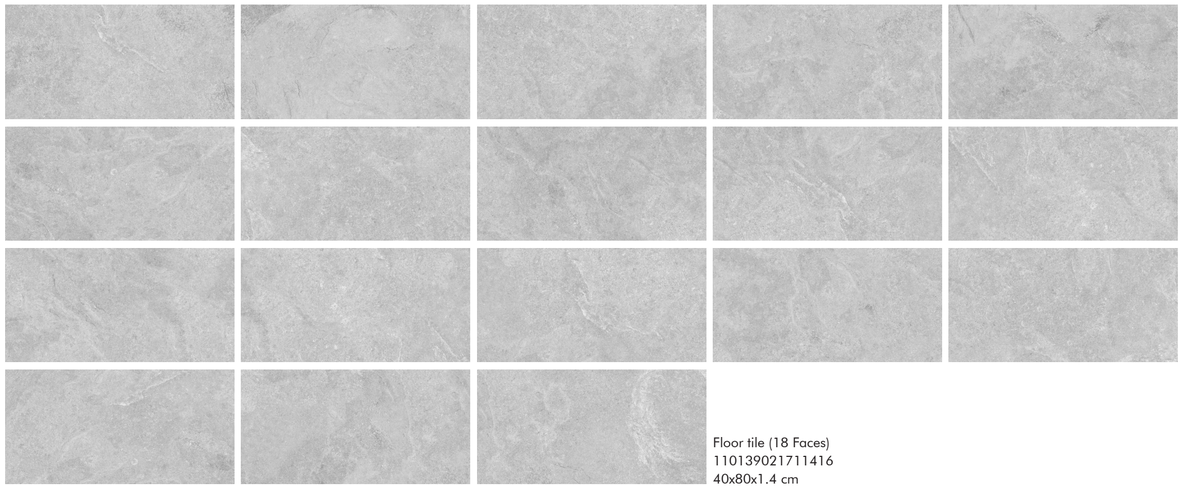

Floor tile (18 Faces)
110139021711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093





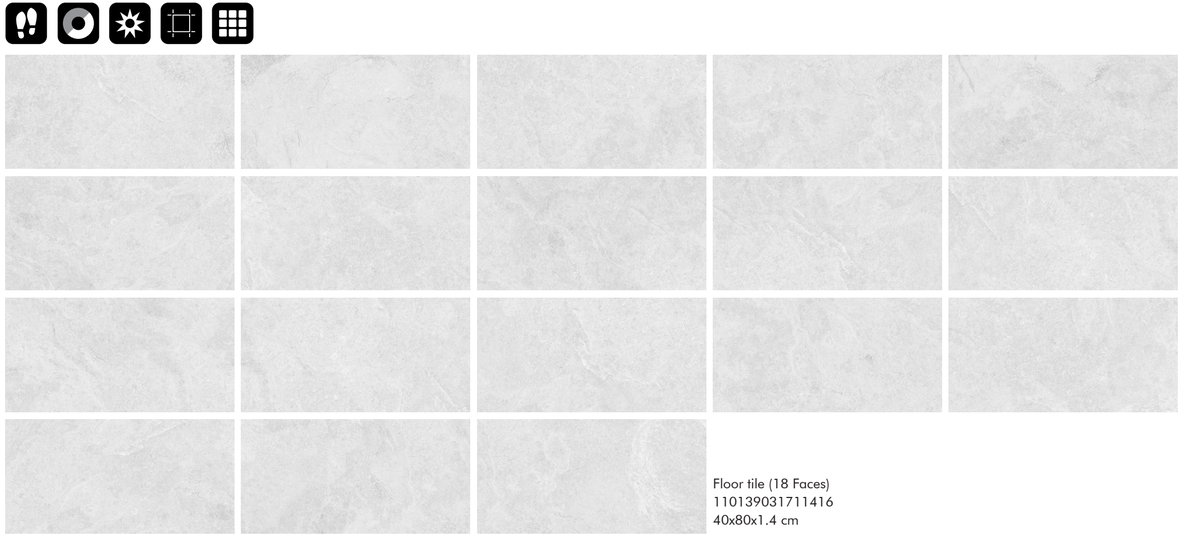

Floor tile (18 Faces)
110139031711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093







Floor tile (18 Faces)
110139041711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093







Floor tile (18 Faces)
110139051711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093







Floor tile (18 Faces)
110139061711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093









Floor tile (18 Faces)
110139071711416
40x80x1.4 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
40x80 cm	1.4 cm	5	1.60	38.40	28	44.80	1093



TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIIa

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIIa	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 5.0%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.5%	± 0.5%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	3% < E <= 6%	3% < E <= 6%
	Modulus of Rupture (MOR)	ISO10545 - Part 4	>=22 N/mm2	>=22 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=1000N >=600N	>=1100N >=600N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-	-	Min.6

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIII

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIII	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 10%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.3%	± 0.3%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	10% < E <= 20%	16 ± 2%
	Modulus of Rupture (MOR) Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=12 N/mm2 >=15 N/mm2	>=15 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=600N >=200N	>=800N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-		Min.6

الخزف السعودي
Saudi Ceramics

للحجز و الاستفسار: 920011124

tamara baseeta tabby

saudiceramics
shop.saudiceramics.com

Download on the App Store
Google play

V15