GENERAL
CATALOGUE

CERAMIC TILES

SAUDI MADE

الخزف السعودي
Saudi Ceramics

Index

Our ceramic tiles are available in a variety of sizes, thickness, and finishings to cater to every customers needs and requirements.

60x60x1.0 cm

PGS 04-31

Icon guide

بلاط ارضيات	بلاط الحائط	لامع	مطفي	مطفي حريري	مقاس متطابق	أوجة مختلفة	استخدام خارجي	بركة السباحة	استخدام ثقيل
FLOOR TILE	WALL TILE	GLOSSY	MATT	SILK MATT	RECTIFIED	RANDOM FACES	EXTERIOR USE	POOL	HEAVY DUTY

الخزف السعودي
Saudi Ceramics

Page elements layout guide

This catalogue contains all the information, details and characteristics available at printing time. The manufacturer, however, reserves the right to introduce modifications or changes as deemed appropriate for product improvement and the benefit of customers.

The entire contents of this catalogue are copyright. No pictures, texts, illustrations or graphic concepts may be reproduced, either wholly or partially, without the express permission of Saudi Ceramics.

All colours and hues appearing in this catalogue should be considered approximate due to the printing process involved.

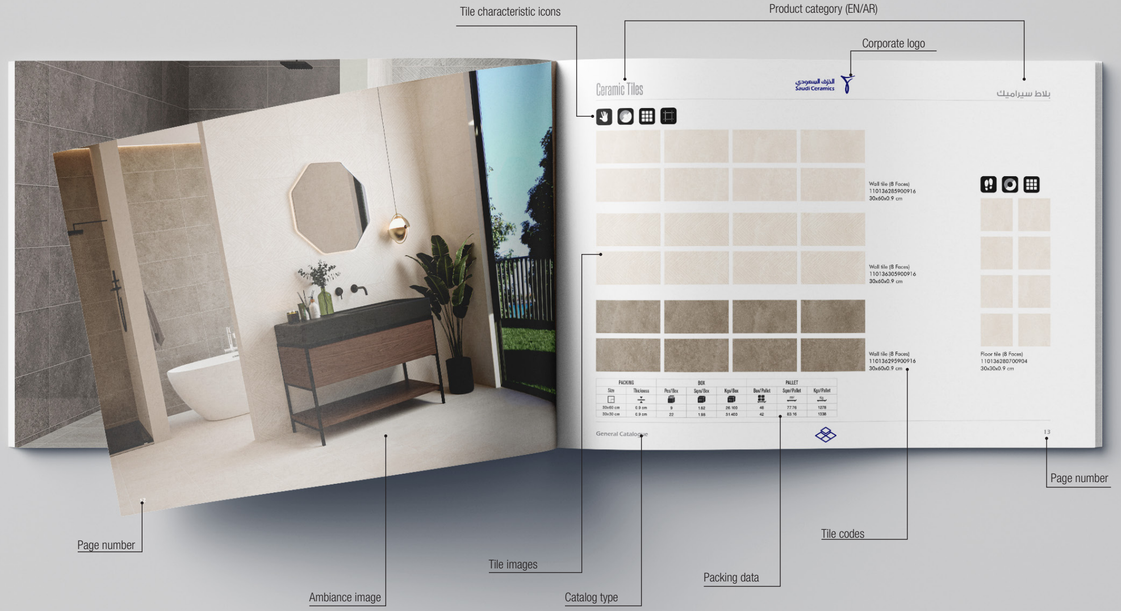


Floor tiles
60x60x1.0 cm



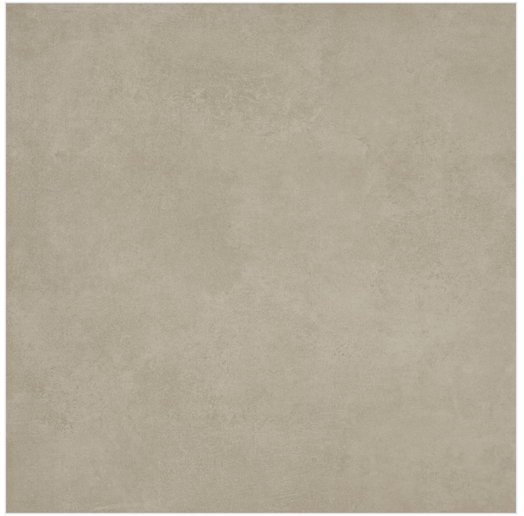

Floor tile
110114952501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/ Box	Sqm/ Box	Kgs/ Box	Box/ Pallet	Sqm/ Pallet	Kgs/ Pallet
						m^2	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Floor tile
110114362501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Floor tile
110114092501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Floor tile
110114072501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



Floor tile (4 Faces)
110102972501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

Floor tile (4 Faces)
110102962501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/ Box	Sqm/ Box	Kgs/ Box	Box/ Pallet	Sqm/ Pallet	Kgs/ Pallet
			m^2	Kg		m^2	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

Floor tile (3 Faces)
110098302501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

Floor tile (4 Faces)
110098282501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m²	Kg		m²	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

Floor tile (5 Faces)
110098272501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



Floor tile (5 Faces)
110098262501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m²	Kg		m²	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

Floor tile (3 Faces)
110098242501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

Floor tile (3 Faces)
110098232501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



Floor tile (6 Faces)
110098212501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIIa

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIIa	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 5.0%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.5%	± 0.5%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	3% < E <= 6%	3% < E <= 6%
	Modulus of Rupture (MOR)	ISO10545 - Part 4	>=22 N/mm2	>=22 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=1000N >=600N	>=1100N >=600N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-	-	Min.6

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIII

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIII	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 10%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.3%	± 0.3%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	10% < E <= 20%	16 ± 2%
	Modulus of Rupture (MOR) Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=12 N/mm2 >=15 N/mm2	>=15 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=600N >=200N	>=800N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-		Min.6

الخزف السعودي
Saudi Ceramics

للحجز و الاستفسار: 920011124

tamara baseeta tabby

saudiceramics
shop.saudiceramics.com

Download on the App Store
Google play

V15