
GENERAL
CATALOGUE

PORCELAIN TILES

SAUDI MADE | الخزف السعودي Saudi Ceramics

الخزف السعودي
Saudi Ceramics



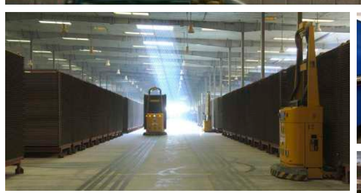







About us

Founded in 1977, Saudi Ceramic Company is a leading provider of quality building solutions that includes various types of ceramic products (ceramic tiles, porcelain tiles, sanitary wares and accessories), electric water heaters, bathroom fittings, including baths, shower trays, mirrors and mixers. Other products include plastics, red bricks and ready-made bathrooms (Pods).

With over 42 years experience, the Company has gained a well-deserved reputation for manufacturing quality with high standards both nationally and internationally.
Saudi Ceramic Company is the largest manufacturer of its kind in Saudi Arabia and a well-recognised brand.

The company has its own R&D department, that works in order to detect the future needs and to create new processes and products. The implementation of new raw materials; new colors, textures and finishes; technologies that reduce the production costs of the new ink jet systems are part of the tasks performed by our Innovation team.

State-of-the-art investments, quality, customer service and satisfaction are the trademarks of its long term visionary philosophy.

Icon guide

بلاط ارضيات
FLOOR TILE

بلاط الحائط
WALL TILE

مقاس متطابق
RECTIFIED

اوجة مختلفة
RANDOM FACES

بورسلان مزجج
GLAZED PORCELAIN

مطفي
MATT

مصقول
POLISHED

بلاط لماع (مصقول)
FULL POLISH

MICROCID SHINE

نصف لمعة
LAPPATO

بلاط واجهات
FAÇADE TILE

سماكة 2.0 سم
2.0 cm THICKNESS

استخدام خارجي
EXTERIOR USE

مطفي حريري
POLISHED MATT

الطباعة البارزة الرقمية
DIGITAL RELIEF PRINTING

بلاط بورسلان سماكة 2CM THICKNESS

سهل التركيب باستخدام الطريقة المعروفة

مقاومة الخدش

يتحمل العوامل الجوية ولا يتصبغ ولا يغير لونه

مقاومة الصدمة الحرارية

مقاومة الحريق

- مثالي للأرضيات والواجهات الخارجية.
- أرضيات خارجية - مواقف سيارات - حدائق - أرصفة.
- مناسب للأرضيات الداخلية كثيفة الحركة.
- يمكن التركيب على حمالات خاصة لأرضيات المكاتب والغرف التي يتم تمديد أسلاك كهربائية وإنترنت.
- سهل التركيب على أرضيات عشبية وحصي بدون مادة لاصقة مع إمكانية الفك والتركيب مرة أخرى.
- يتم تركيبه كجدران خارجية وواجهات فلل وعمائر ومنشآت كبيرة.
- مقاوم للعوامل الجوية الخارجية ولا يتأثر بأشعة الشمس والأمطار والرطوبة.

Porcelain tiles
60x60x2.0 cm




Cloudy Stone Light

Porcelain tile (16 FACES)
111138692502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Clody Stone

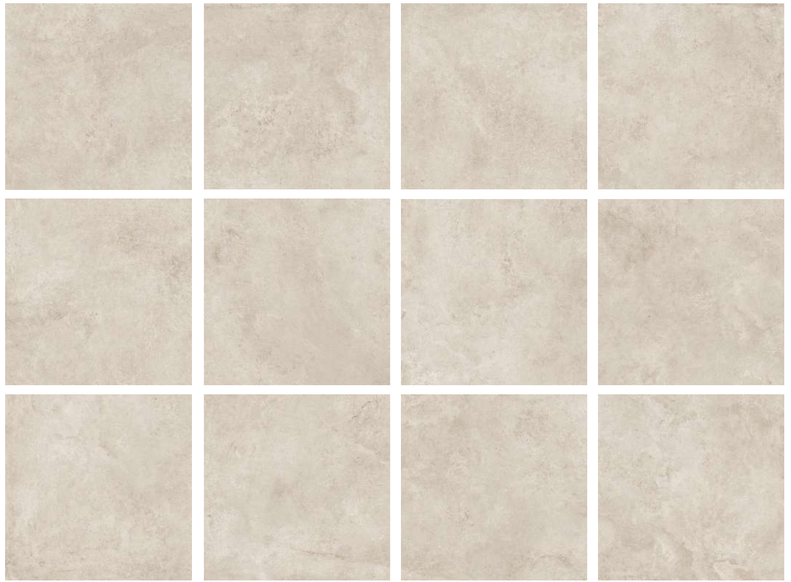

Porcelain tile (16 FACES)
111138702502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Rustic Stone Brown




Porcelain tile (6 FACES)
111138742502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Rustic Stone

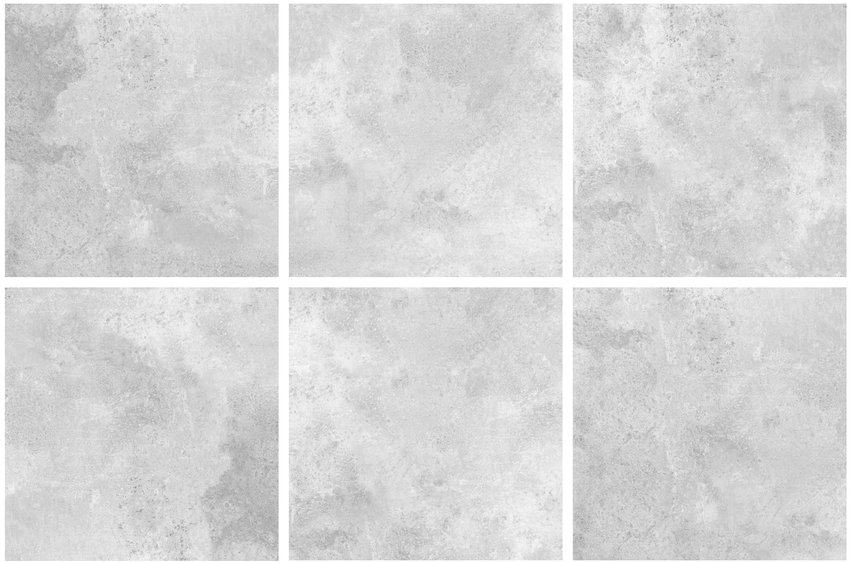


Porcelain tile (6 FACES)
111138732502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/ Box	Sqm/ Box	Kgs/ Box	Box/ Pallet	Sqm/ Pallet	Kgs/ Pallet
						m^2	Kg
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Sandstone Light

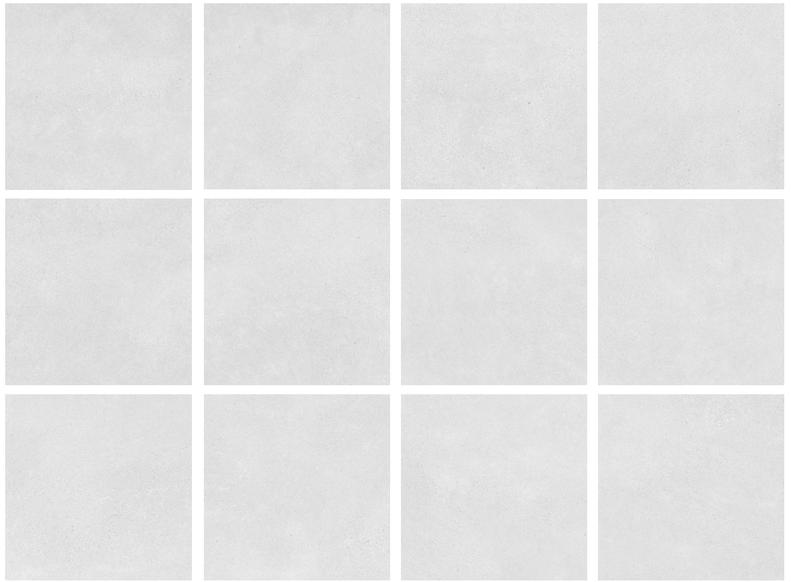


Porcelain tile (16 FACES)
111138712502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Sandstone

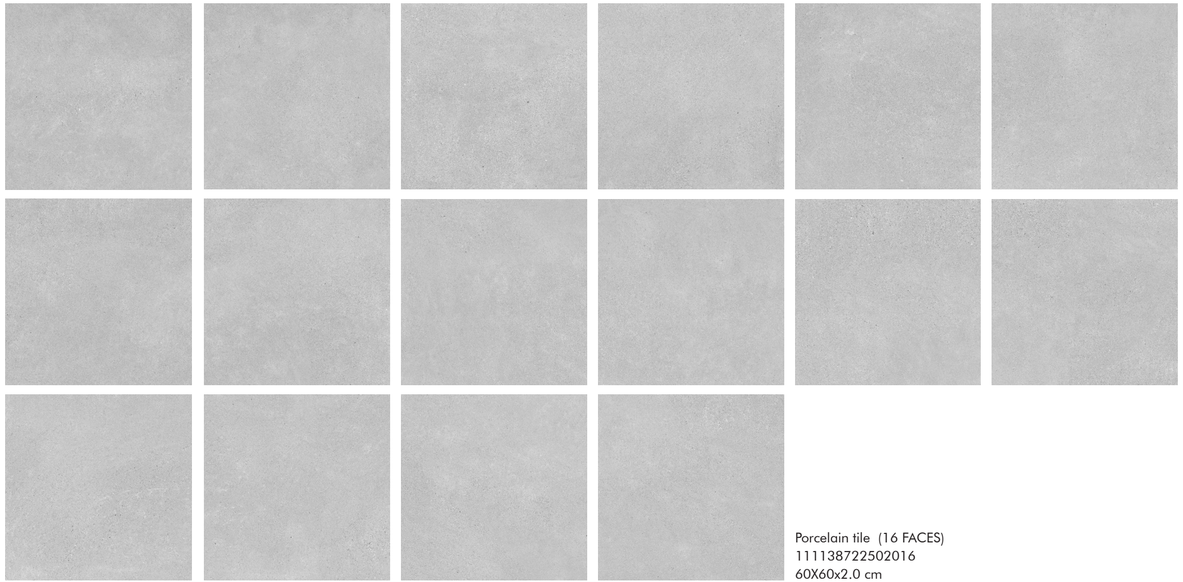

Porcelain tile (16 FACES)
111138722502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Cement Look Light

Porcelain tile (16 FACES)
111138752502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147



Cement Look



Porcelain tile (24 FACES)
111138772502016
60X60x2.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x60 cm	2.0 cm	2	0.72	35.28	32	23.04	1147

TECHNICAL SPECIFICATION

Technical Specification for Porcelain Tiles: Glazed (GL)
As per International Standard ISO 13006 Group (Bla – GL)

Symbol	Technical Characteristic	Standard Test Methods	ISO 13006	Saudi Ceramics Specifications	
				Un-Rectified	Rectified
	Length and Width	ISO 10545, Part 2	± 0.6% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.1%
	Thickness	ISO 10545, Part 2	± 5.0%	± 5.0%	± 5.0%
	Straightness of Sides	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Rectangularity	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Surface Flatness	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.40% (Rectified)	± 0.30%	± 0.30%
	Water Absorption %	ISO 10545, Part 3	<=0.5%	<=0.5%	<=0.5%
	Breaking Strength	ISO 10545, Part 4	>=1300N	>=1400N	>=1400N
	Modulus of Rupture (MOR)	ISO 10545, Part 4	>=35 N/mm2	>=35 N/mm2	>=35 N/mm2
	Resistance to Surface Abrasion	ISO 10545, Part 7	Manufacturer to state the class	Class 3 - 5	Class 3 - 5
	Linear thermal Expansion	ISO 10545, Part 8	Test method available	≤ 9x10-6 K-1	≤ 9x10-6 K-1
	Resistance to Thermal Shock	ISO 10545, Part 9	Test method available	Resistant	Resistant
	Crazing Resistance	ISO 10545, Part 11	Required	Resistant	Resistant
	Frost Resistance	ISO 10545, Part 12	Required	Resistant	Resistant
	Resistance to Chemicals	ISO 10545, Part 13	Manufacturer to state classifica-tion	Min B	Min B
	Resistance to Stains	ISO 10545, Part 14	Min Class 3	Class 3	Class 3
	Color resistance to UV light	-	No change in color	No change in color	No change in color

TECHNICAL SPECIFICATION

Technical Specification for Porcelain Tiles: Unglazed (UGL)
As per International Standard ISO 13006 Group (Bla – UGL)

Symbol	Technical Characteristic	Standard Test Methods	ISO 13006	Saudi Ceramics Specifications	
				Un-Rectified Un-Polished	Rectified Polished & Un -Polished
	Length and Width	ISO 10545, Part 2	± 0.6% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.1%
	Thickness	ISO 10545, Part 2	± 5.0%	± 5.0%	± 5.0%
	Straightness of Sides	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Rectangularity	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Surface Flatness	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.40% (Rectified)	± 0.30%	± 0.30%
	Water Absorption %	ISO 10545, Part 3	<=0.5%	<=0.5%	<=0.5%
	Breaking Strength	ISO 10545, Part 4	>=1300N	>=1400N	>=1400N
	Modulus of Rupture (MOR)	ISO 10545, Part 4	>=35 N/mm2	>=35 N/mm2	>=35 N/mm2
	Resistance to Deep Abrasion	ISO 10545, Part 7	<=175/mm3	<=150/mm3	<=150/mm3
	Linear thermal Expansion	ISO 10545, Part 8	Test method available	≤ 9x10-6 K-1	≤ 9x10-6 K-1
	Resistance to Thermal Shock	ISO 10545, Part 9	Test method available	Resistant	Resistant
	Crazing Resistance	ISO 10545, Part 11	Required	Resistant	Resistant
	Frost Resistance	ISO 10545, Part 12	Required	Resistant	Resistant
	Resistance to Chemicals	ISO 10545, Part 13	Manufacturer to state classifica-tion	Min B	Min B
	Resistance to Stains	ISO 10545, Part 14	Min Class 3	Class 3	Class 3
	Color resistance to UV light	-	No change in color	No change in color	No change in color

الخزف السعودي
Saudi Ceramics

للحجز و الاستفسار: 920011124

tamara baseeta tabby

saudiceramics
shop.saudiceramics.com

Download on the App Store
Google play

V16