GENERAL
CATALOGUE

CERAMIC TILES

SAUDI MADE

الخزف السعودي
Saudi Ceramics

Index

Our ceramic tiles are available in a variety of sizes, thickness, and finishings to cater to every customers needs and requirements.

30x90x1.0 cm

PGS 04-29

Icon guide

بلاط ارضيات FLOOR TILE	بلاط الحائط WALL TILE	لامع GLOSSY	مطفي MATT	مطفي حريري SILK MATT	مقاس متطابق RECTIFIED	أوجة مختلفة RANDOM FACES	استخدام خارجي EXTERIOR USE	بركة السباحة POOL	استخدام ثقيل HEAVY DUTY

الخزف السعودي
Saudi Ceramics

Page elements layout guide

This catalogue contains all the information, details and characteristics available at printing time. The manufacturer, however, reserves the right to introduce modifications or changes as deemed appropriate for product improvement and the benefit of customers.

The entire contents of this catalogue are copyright. No pictures, texts, illustrations or graphic concepts may be reproduced, either wholly or partially, without the express permission of Saudi Ceramics.

All colours and hues appearing in this catalogue should be considered approximate due to the printing process involved.

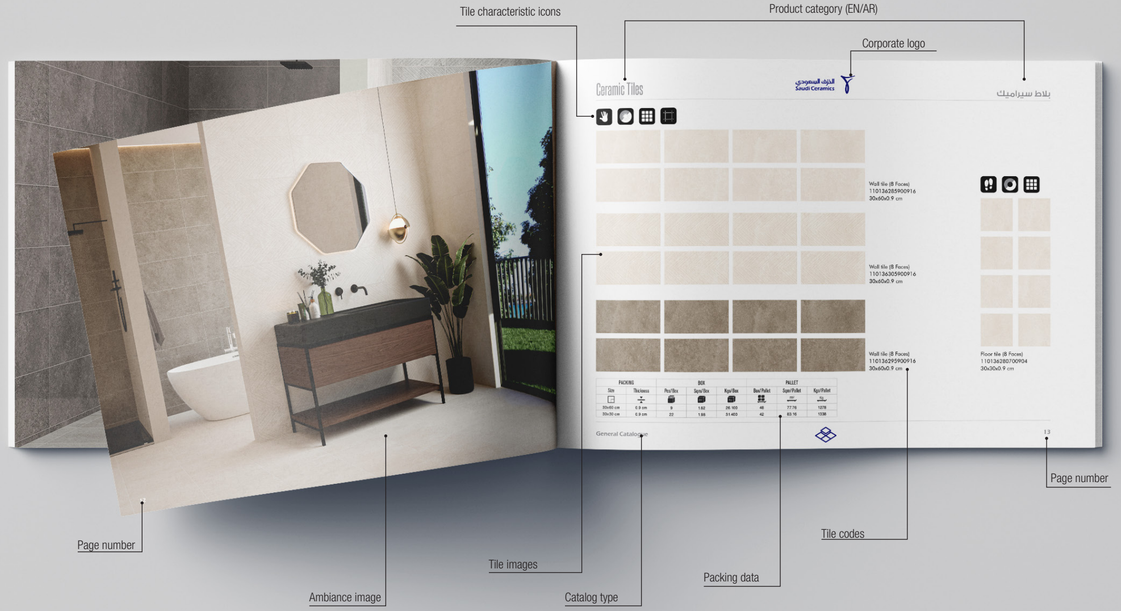


Wall tiles
30x90x1.0 cm





Wall tile (6 Faces)
110137565921016
30x90x1.0 cm



Wall tile (6 Faces)
110137575921016
30x90x1.0 cm



Floor tile (4 Faces)
110137582501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



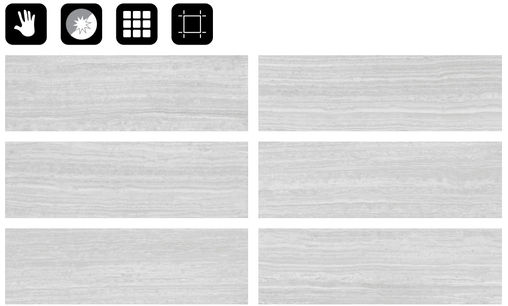

Wall tile (6 Faces)
110137535921016
30x90x1.0 cm

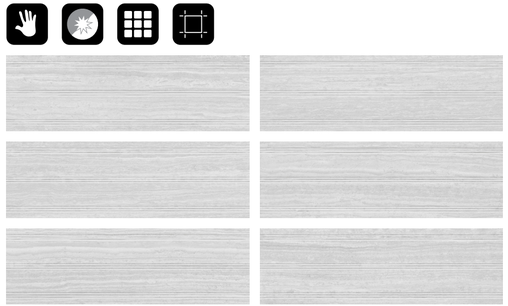

Wall tile (6 Faces)
110137545921016
30x90x1.0 cm



Floor tile (4 Faces)
110137552501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



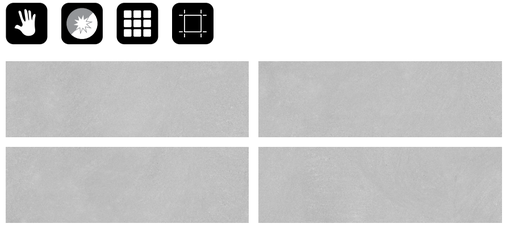

Wall tile (4 Faces)
110137595921016
30x90x1.0 cm

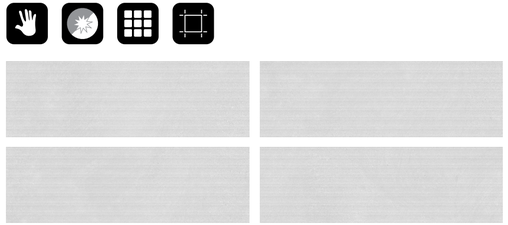

Wall tile (4 Faces)
110137615921016
30x90x1.0 cm

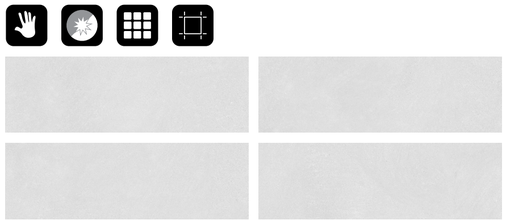

Wall tile (4 Faces)
110137605921016
30x90x1.0 cm

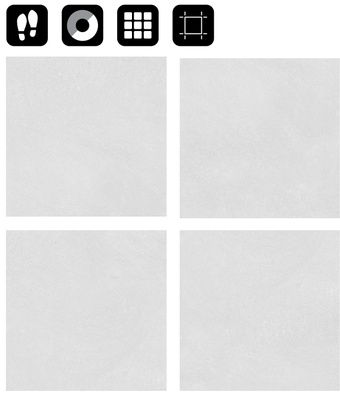

Floor tile (4 Faces)
110137622501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



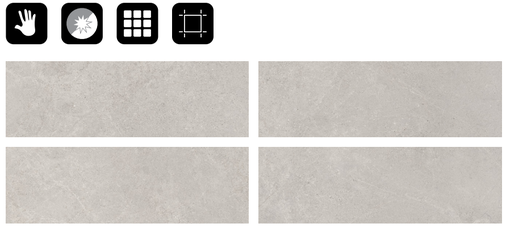

Wall tile (4 Faces)
110117155921016
30x90x1.0 cm

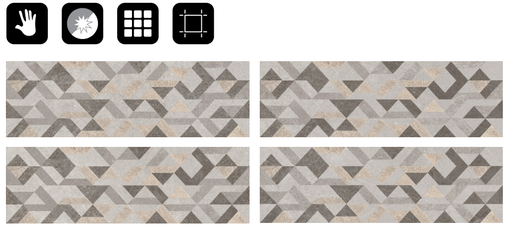

Wall tile (4 Faces)
110117165921016
30x90x1.0 cm

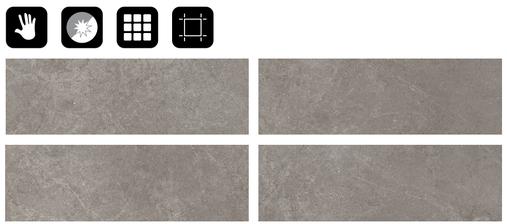

Wall tile (4 Faces)
110117175921016
30x90x1.0 cm

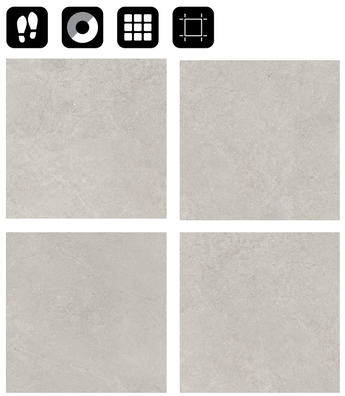

Floor tile (4 Faces)
110117152501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m²	Kg		m²	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Wall tile (2 Faces)
110121895921016
30x90x1.0 cm



Wall tile (2 Faces)
110121905921016
30x90x1.0 cm



Floor tile
110121902501016
60x60x1.0 cm

Wall tile
110121915921016
30x90x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Wall tile
110121925921016
30x90x1.0 cm



Wall tile
110121935921016
30x90x1.0 cm



Floor tile
110121922501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m²	Kg		m²	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Wall tile (9 Faces)
110116875921016
30x90x1.0 cm



Wall tile (9 Faces)
110116885921016
30x90x1.0 cm



Wall tile (9 Faces)
110116895921016
30x90x1.0 cm



Floor tile (6 Faces)
110116872501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Wall tile (4 Faces)
110116905921016
30x90x1.0 cm



Wall tile (4 Faces)
110116915921016
30x90x1.0 cm



Floor tile (4 Faces)
110116902501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774





Wall tile (4 Faces)
110116925921016
30x90x1.0 cm



Wall tile (4 Faces)
110116935921016
30x90x1.0 cm

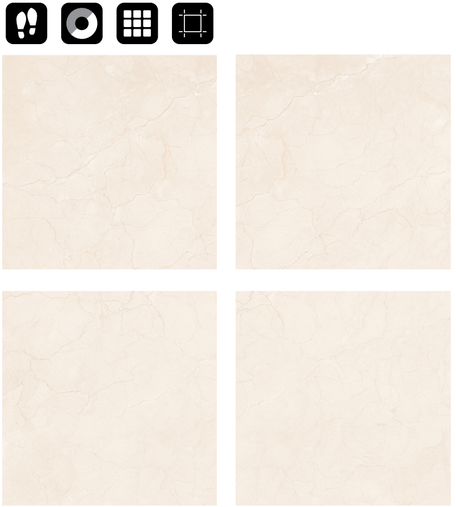

Floor tile (4 Faces)
110116922501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



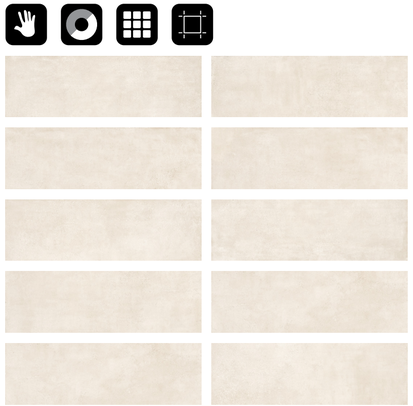

Wall tile (10 Faces)
110117005921016
30x90x1.0 cm

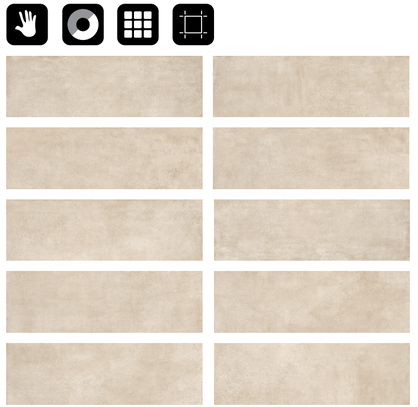

Wall tile (10 Faces)
110117015921016
30x90x1.0 cm

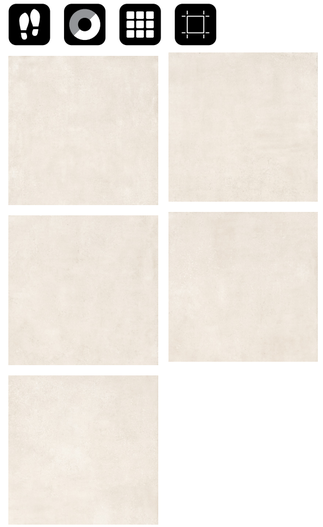

Floor tile (5 Faces)
110117002501016
60x60x1.0 cm



Wall tile
110117025921016
30x90x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



Wall tile (12 Faces)
110117035921016
30x90x1.0 cm

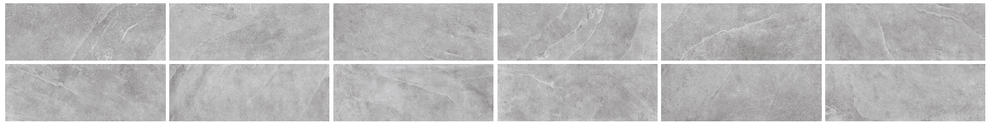

Wall tile (12 Faces)
110117045921016
30x90x1.0 cm



Wall tile (12 Faces)
110117055921016
30x90x1.0 cm

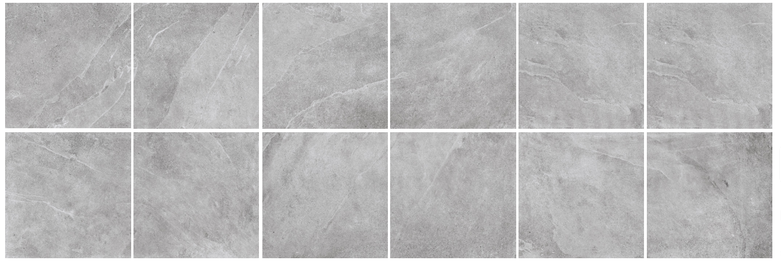

Floor tile (12 Faces)
110117042501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774



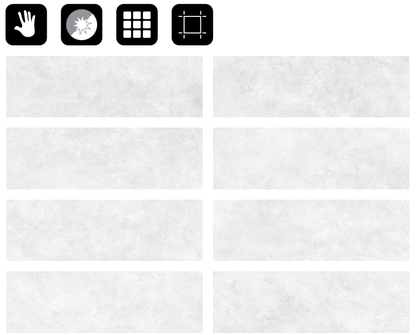

Wall tile (8 Faces)
110117085921016
30x90x1.0 cm

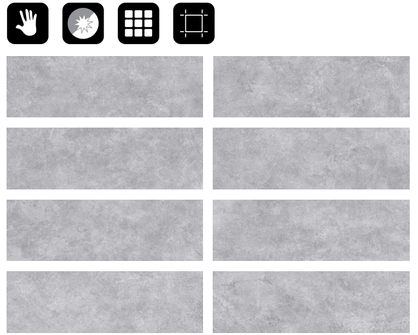

Wall tile (8 Faces)
110117095921016
30x90x1.0 cm



Wall tile
110117105921016
30x90x1.0 cm

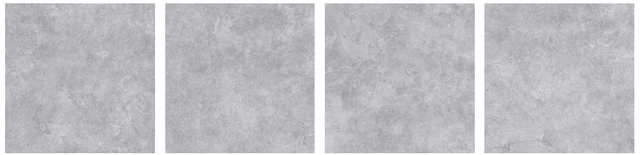

Floor tile (4 Faces)
110117092501016
60x60x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
30x90 cm	1.0 cm	6	1.62	30.000	48	77.76	1458
60x60 cm	1.0 cm	5	1.80	31.500	24	43.20	774

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIIa

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIIa	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 5.0%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.5%	± 0.5%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	3% < E <= 6%	3% < E <= 6%
	Modulus of Rupture (MOR)	ISO10545 - Part 4	>=22 N/mm2	>=22 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=1000N >=600N	>=1100N >=600N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-	-	Min.6

TECHNICAL SPECIFICATION

Technical Specification for Glazed Ceramic Tiles
*Specifications # SASO/ISO 13006
GROUP BIII

Symbol	Technical Characteristics	Standard Test Methods	*International Standard ISO 13006 Group BIII	Saudi Ceramics Specifications
	Length & Width 7 cm ≤ N < 15 cm N ≥ 15 cm	ISO10545 - Part 2	± 0.9 mm ± 0.6%	± 0.9 mm ± 0.6%
	Thickness deviation %	ISO10545 - Part 2	+ 10%	+ 5.0%
	Straightness	ISO10545 - Part 2	± 0.5%	± 0.5%
	Rectangularity	ISO10545 - Part 2	± 0.3%	± 0.3%
	Flatness deviation (%)	ISO10545 - Part 2	+ 0.5%	+ 0.35%
	Water Absorption (%)	ISO10545 - Part 3	10% < E <= 20%	16 ± 2%
	Modulus of Rupture (MOR) Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=12 N/mm2 >=15 N/mm2	>=15 N/mm2
	Breaking Strength Thickness ≥ 7.5 mm Thickness < 7.5 mm	ISO10545 - Part 4	>=600N >=200N	>=800N
	Resistance to Surface abrasion (Class)	ISO10545 - Part 7	Manufacturer to state abrasion class	2-5
	Coefficient of Linear thermal Expansion	ISO10545 - Part 8	Test method available	< 8x10-6 ºK-1
	Resistance to Thermal shock	ISO10545 - Part 9	No Visible defect	No Visible defect
	Crazing Resistance	ISO10545 - Part 11	Required	Resistant
	Resistance to Household Chemicals (Class)	ISO10545 - Part 13	Min. B	Min. B
	Resistance to Acids & Alkalis	ISO10545 - Part 13	Test method available	Min. B
	Resistance to stains (Class)	ISO10545 - Part 14	Min. 3	Min. 3
	Hardness Moh's scale (Class)	-		Min.6

الخزف السعودي
Saudi Ceramics

للحجز و الاستفسار: 920011124

tamara baseeta tabby

saudiceramics
shop.saudiceramics.com

Download on the App Store
Google play

V15