GENERAL
CATALOGUE

PORCELAIN TILES

SAUDI MADE

الخزف السعودي
Saudi Ceramics

الخزف السعودي
Saudi Ceramics











About us

Founded in 1977, Saudi Ceramic Company is a leading provider of quality building solutions that includes various types of ceramic products (ceramic tiles, porcelain tiles, sanitary wares and accessories), electric water heaters, bathroom fittings, including baths, shower trays, mirrors and mixers. Other products include plastics, red bricks and ready-made bathrooms (Pods).

With over 42 years experience, the Company has gained a well-deserved reputation for manufacturing quality with high standards both nationally and internationally.
Saudi Ceramic Company is the largest manufacturer of its kind in Saudi Arabia and a well-recognised brand.

The company has its own R&D department, that works in order to detect the future needs and to create new processes and products. The implementation of new raw materials; new colors, textures and finishes; technologies that reduce the production costs of the new ink jet systems are part of the tasks performed by our Innovation team.

State-of-the-art investments, quality, customer service and satisfaction are the trademarks of its long term visionary philosophy.

Icon guide

بلاط ارضيات
FLOOR TILE

بلاط الحائط
WALL TILE

مقاس متطابق
RECTIFIED

اوجة مختلفة
RANDOM FACES

بورسلان مزجج
GLAZED PORCELAIN

مطفي
MATT

مصقول
POLISHED

بلاط لماع (مصقول)
FULL POLISH

MICROCID SHINE

نصف لمعة
LAPPATO

بلاط واجهات
FAÇADE TILE

سماكة 2.0 سم
2.0 cm THICKNESS

استخدام خارجي
EXTERIOR USE

مطفي حريري
POLISHED MATT

الطباعة البارزة الرقمية
DIGITAL RELIEF PRINTING


Porcelain tiles
60x120x1.0 cm



Grigio Carnico Light

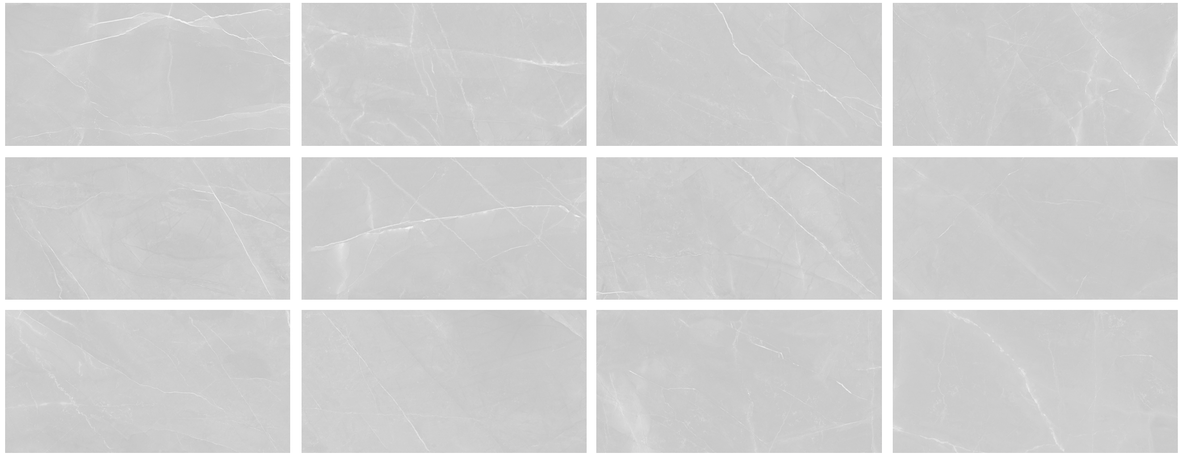

Porcelain tile (12 Faces)
111145032511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Grigio Carnico

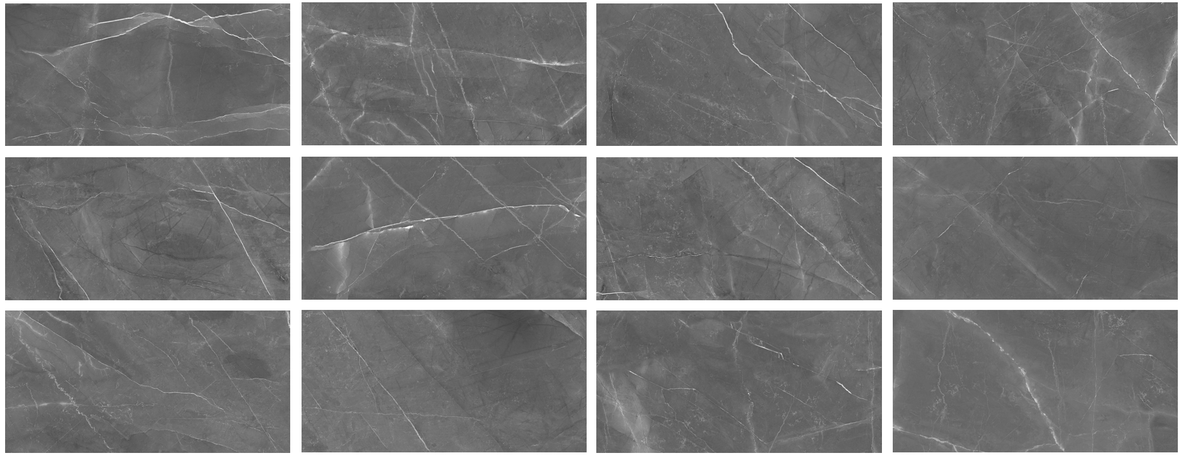

Porcelain tile (12 Faces)
111144232511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Calacatta

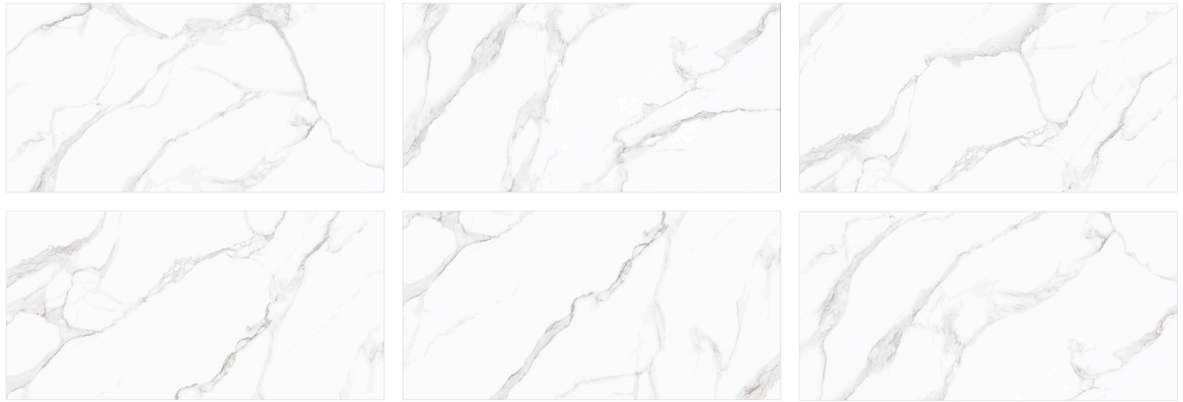

Porcelain tile (6 Faces)
111144422511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Tulia Black

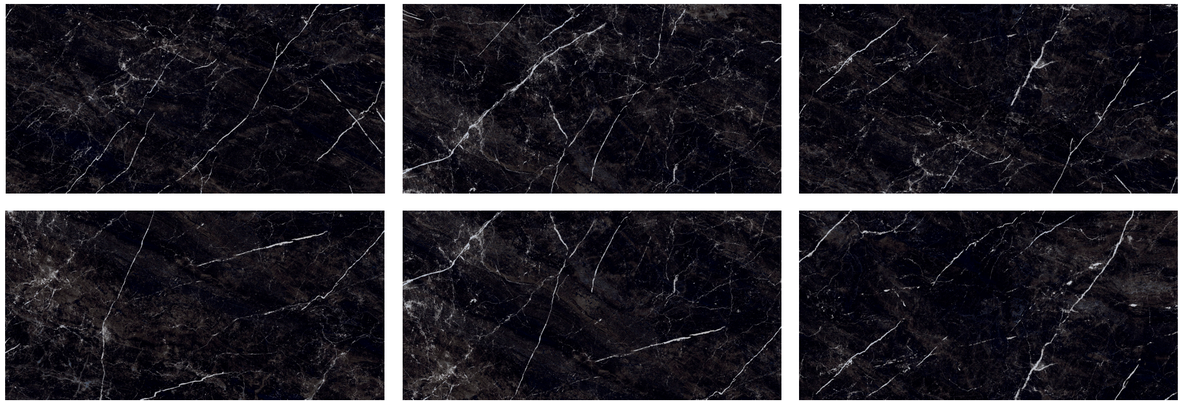

Porcelain tile (6 Faces)
111144242511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Statuario

Porcelain tile (4 Faces)
111145042511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4





Argento Grey



Porcelain tile (3 Faces)
111145062511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Cloudy Soft

Porcelain tile (4 Faces)
111137722511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Fine Stone

Porcelain tile (2 Faces)
111140892511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Silver Cloud

Porcelain tile (4 Faces)
111145052511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Fossil Grey



Porcelain tile (4 Faces)
111144412511013
60x120x1.0 cm

Fossil Light Grey



Porcelain tile (4 Faces)
111140902511013
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
			m^2	Kg		m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Carrara

Porcelain tile (7 Faces)
111140912511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Quartz Beige

Porcelain tile (4 Faces)
111140922511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Quartz Light Grey

Porcelain tile (4 Faces)
111140932511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Quartz Grey

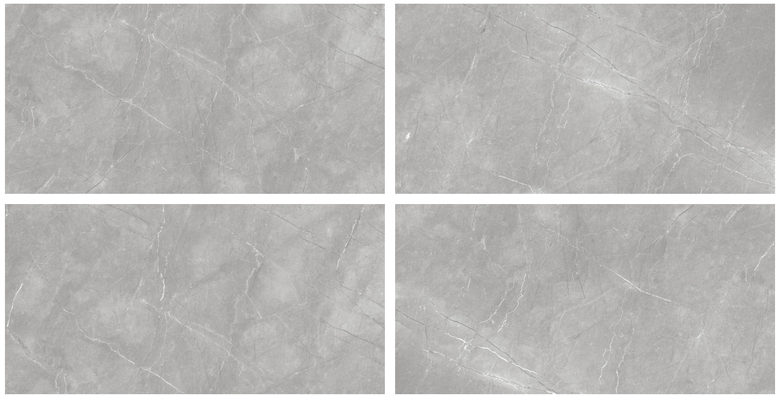

Porcelain tile (4 Faces)
111144252511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Cecilia



Porcelain tile (6 Faces)
111148122511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Travertino Cream

Porcelain tile (12 Faces)
111147342511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Travertino Grey

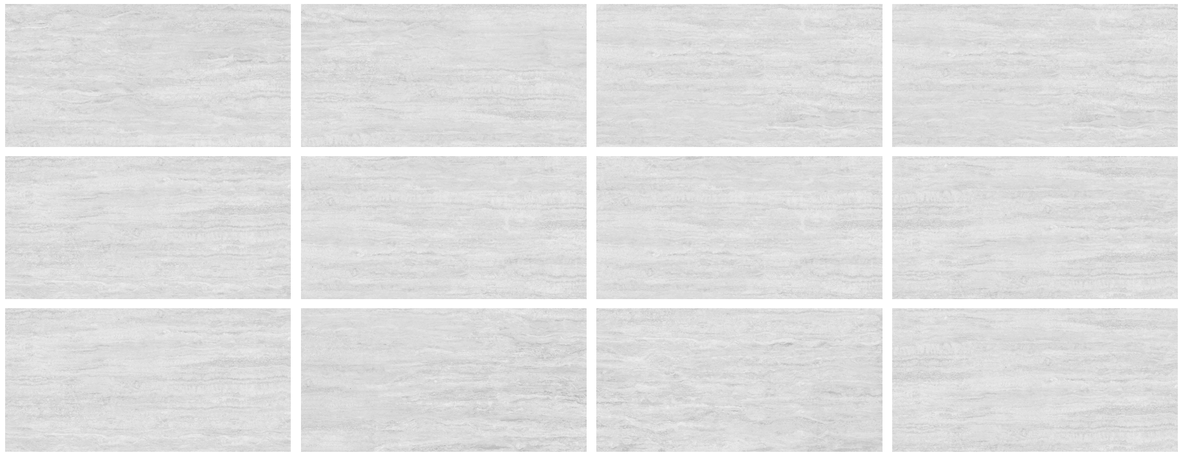

Porcelain tile (12 Faces)
111146882511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Limestone Beige

Porcelain tile (8 Faces)
111146902511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4



Limestone Grey

Porcelain tile (8 Faces)
111146892511016
60x120x1.0 cm

PACKING		BOX			PALLET		
Size	Thickness	Pcs/Box	Sqm/Box	Kgs/Box	Box/Pallet	Sqm/Pallet	Kgs/Pallet
						m^2	Kg
60x120 cm	1.0 cm	2	1.44	35.280	30	43.2	1083.4

TECHNICAL SPECIFICATION

Technical Specification for Porcelain Tiles: Glazed (GL)
As per International Standard ISO 13006 Group (Bla – GL)

Symbol	Technical Characteristic	Standard Test Methods	ISO 13006	Saudi Ceramics Specifications	
				Un-Rectified	Rectified
	Length and Width	ISO 10545, Part 2	± 0.6% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.1%
	Thickness	ISO 10545, Part 2	± 5.0%	± 5.0%	± 5.0%
	Straightness of Sides	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Rectangularity	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Surface Flatness	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.40% (Rectified)	± 0.30%	± 0.30%
	Water Absorption %	ISO 10545, Part 3	<=0.5%	<=0.5%	<=0.5%
	Breaking Strength	ISO 10545, Part 4	>=1300N	>=1400N	>=1400N
	Modulus of Rupture (MOR)	ISO 10545, Part 4	>=35 N/mm2	>=35 N/mm2	>=35 N/mm2
	Resistance to Surface Abrasion	ISO 10545, Part 7	Manufacturer to state the class	Class 3 - 5	Class 3 - 5
	Linear thermal Expansion	ISO 10545, Part 8	Test method available	≤ 9x10-6 K-1	≤ 9x10-6 K-1
	Resistance to Thermal Shock	ISO 10545, Part 9	Test method available	Resistant	Resistant
	Crazing Resistance	ISO 10545, Part 11	Required	Resistant	Resistant
	Frost Resistance	ISO 10545, Part 12	Required	Resistant	Resistant
	Resistance to Chemicals	ISO 10545, Part 13	Manufacturer to state classifica-tion	Min B	Min B
	Resistance to Stains	ISO 10545, Part 14	Min Class 3	Class 3	Class 3
	Color resistance to UV light	-	No change in color	No change in color	No change in color

TECHNICAL SPECIFICATION

Technical Specification for Porcelain Tiles: Unglazed (UGL)
As per International Standard ISO 13006 Group (Bla – UGL)

Symbol	Technical Characteristic	Standard Test Methods	ISO 13006	Saudi Ceramics Specifications	
				Un-Rectified Un-Polished	Rectified Polished & Un -Polished
	Length and Width	ISO 10545, Part 2	± 0.6% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.1%
	Thickness	ISO 10545, Part 2	± 5.0%	± 5.0%	± 5.0%
	Straightness of Sides	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Rectangularity	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.3% (Rectified)	± 0.30%	± 0.20%
	Surface Flatness	ISO 10545, Part 2	± 0.50% (Unrectified) ± 0.40% (Rectified)	± 0.30%	± 0.30%
	Water Absorption %	ISO 10545, Part 3	<=0.5%	<=0.5%	<=0.5%
	Breaking Strength	ISO 10545, Part 4	>=1300N	>=1400N	>=1400N
	Modulus of Rupture (MOR)	ISO 10545, Part 4	>=35 N/mm2	>=35 N/mm2	>=35 N/mm2
	Resistance to Deep Abrasion	ISO 10545, Part 7	<=175/mm3	<=150/mm3	<=150/mm3
	Linear thermal Expansion	ISO 10545, Part 8	Test method available	≤ 9x10-6 K-1	≤ 9x10-6 K-1
	Resistance to Thermal Shock	ISO 10545, Part 9	Test method available	Resistant	Resistant
	Crazing Resistance	ISO 10545, Part 11	Required	Resistant	Resistant
	Frost Resistance	ISO 10545, Part 12	Required	Resistant	Resistant
	Resistance to Chemicals	ISO 10545, Part 13	Manufacturer to state classifica-tion	Min B	Min B
	Resistance to Stains	ISO 10545, Part 14	Min Class 3	Class 3	Class 3
	Color resistance to UV light	-	No change in color	No change in color	No change in color

الخزف السعودي
Saudi Ceramics

للحجز و الاستفسار: 920011124

tamara baseeta tabby

Download on the App Store
Google play

saudiceramics
shop.saudiceramics.com

V16